

# Panel Mount Industrial Display Monitor

Model # IPMB-15W




## Features

- 6mm aluminum front bezel with hardness glass protect screen
- 15.6 inch wide screen , support 1920x1080 resolution
- DVI-D, VGA, Audio input
- Front bezel NEMA4 / IP65 compliant
- Front osd control buttons to optimized display
- Build in 2x 2watts stereo speakers
- Panel (Flush) mount with clips
- Meet standard VESA hole, support desk stand / wall mount / Swing Arm mounting

## Option

- Composite video input
- BNC Loop-in-out
- HDMI or Display port input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen

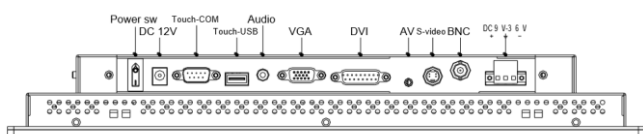

## LCD Characteristics :

Screen Size	15.6"
Backlight Type	LED
Resolution	1920 x 1080
Contrast Ratio	400:1
Brightness ( cd/m2 )	220
View Angles ( H/V )	120/100
Max. Color	262K
MTBF ( Hrs. )	12,000

## Power Specifications :

AC Power Input	External Power Adapter , 100-240V AC Input
Wide Range DC Power Input ( option )	Screw Type Terminal Block with internal wide Range DC 9-36V power module

## Input Signals:

DVI-D	DVI-D 24Pin Connector (Female)
VGA	D-SUB 15Pin Connector (Female)
Audio	3.5" Jack
Power Input	12V DC jack with hanger
Touch-USB ( option )	USB A Type connector
Touch-RS232 ( option )	D-SUB 9P connector ( Female )

## Mechanical and Environment:

IP Protect	Front IP65 Grade
Mounting	Panel ( Flush ) Mount with clips, VESA Mount
Construction	Aluminum Front Bezel + Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	5% - 95% ( non -condensing )
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak ( 11 ms )
Physical Dimension (WxHxD)	400 x 275 x 54 (mm )
Packing Dimension (WxHxD)	505 x 380 x 200 (mm )
Net Weight / Gross Weight	5.5 / 7 ( KGs )
Certification and Approvals	CE / FCC / RoHS

## User Controls Interface:

Power ON / OFF via Front Button
Power Mode Status LED indicator
OSD ( On Screen Display ) Buttons

