

Panel Mount Industrial Display Monitor

Model # IPMB-17W-4K

Features

- 6mm aluminum front bezel with hardness glass protect screen
- 17.3 inch TFT LCD wide screen support 4K resolution 3840 x 2160
- Support 1920 x 1080 & 1920 x 1200 resolution
- Display-Port 1.4 x1 , HDMI 2.0 x 2
- Front bezel NEMA4 / IP65 compliant
- Front osd control buttons to optimized display
- Build in 2x 2watts stereo speakers
- Panel (Flush) mount with clips & Rack Mount (7U)
- Meet standard VESA hole, support desk stand / wall mount / Swing Arm mounting

Option

- DC 9~36 V power input
- AR Hardness glass
- Touch screen



LCD Characteristics :


Screen Size	17.3"
Backlight Type	LED
Resolution	3840x2160
Contrast Ratio	1000:1
Brightness (cd/m2)	400
View Angles (H/V)	178/178
Pixel Size (HxV) mm	0.0995x0.0995
Max. Color	16.7M
MTBF (Hrs.)	30,000

Input Signals:

Display-Port	Display- Port 1.4 (4K-60Hz)
HDMI	2 x HDMI 2.0 (4K-60Hz)
Power Input	12V DC jack with hanger
Touch-USB (option)	USB A Type connector
Touch-RS232 (option)	D-SUB 9P connector (Female)

User Controls Interface:

Power ON / OFF via Front Button
Power Mode Status LED indicator
OSD (On Screen Display) Buttons




Power Specifications :

AC Power Input	External Power Adapter , 100-240V AC Input
Wide Range DC Power Input (option)	Screw Type Terminal Block with internal wide Range DC 9-36V power module

Mechanical and Environment:

IP Protect	Front IP65 Grade
Mounting	Rack Mount / Panel (Flush) Mount with clips / VESA Mount
Construction	Aluminum Front Bezel + Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	5% - 95% (non -condensing)
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak (11 ms)
Physical Dimension (WxHxD)	482 x 310(7U) x 47.8 (mm)
Packing Dimension (WxHxD)	550 x 420 x 200 (mm)
Net Weight / Gross Weight	8 / 10.5(KGs)
Certification and Approvals	CE / FCC / RoHS

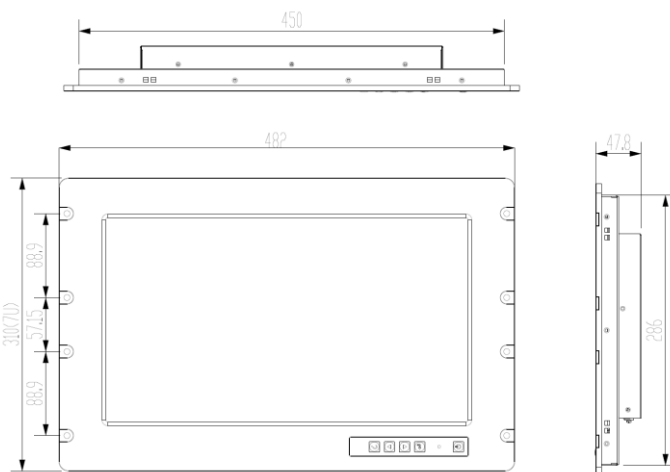

CE FC RoHS COMPLIANT