



Rugged Military Grade 12 ports DVI LCD KVM Switch

Optimize rack space. Maximize rack monitoring




USB port for Keyboard/Mouse

Features

- Meet MIL-STD-810F/G standard
- 1U 17" or 19" LCD Console Drawer, wide operation temperature support 1280 x 1024 resolution
- Build-in 12 port DVI-D KVM switch
- Additional one USB console ports to add local KB or MS (front)
- Sealed 104-keys IP65 silicone keyboard and touchpad with backlight
- MIL connector for power input
- Self-locking and auto release rails for ultra convenience

Options

- DC 9~36V power input
- High brightness LCD panel, up to 1000 nits
- Front AR or EMC glass protect screen

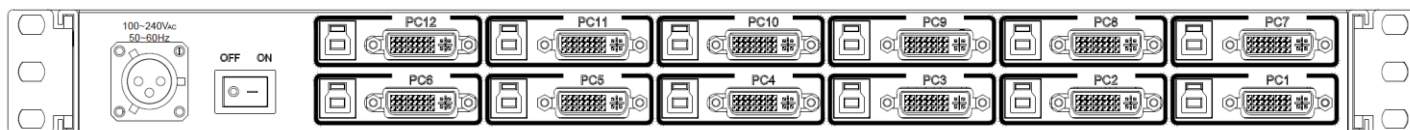

Rear of KVM-1712PD/1912PD-M8

Part No.	KVM-1712PD-M8	KVM-1912PD-M8
Direct no. of Computers	12	
KVM Connectors	12	
LCD	Size	17"
	Backlight	LED
	Resolution	1280 x 1024
	Max.color	16.7M
	Luminance	350cd/m2
	View Angel (H/V)	170 / 160
	Contrast Ratio	1000 : 1
Port Selection	Push Button, Hotkey	
USB Local Console	Yes, front USB for Keyboard / Mouse	
KB/Mouse Emulation	USB	
Rack Depth	580mm to 1000mm (rack cabinet front rails to rear rails)	
Power	100-240V AC 50/60Hz via 3 pins lock connector	
Environment (MIL-STD-810G)	Operation temp: -20 to 70°C	(MIL-STD-810, Method 501.5 & 502.5)
	Storage temp: -30 to 80°C	(MIL-STD-810, Method 501.5 & 502.5)
	Humidity: 5% - 95%, non-condensing	(MIL-STD-810, Method 507.5)
	Shock/Vibration: Procedure VI, 50G @ 11ms	(MIL-STD-810, Method 516.6)
	Altitude: 10,000 ft Operational, 30,000 ft Storage	(MIL-STD-810, Method 500.5)
Physical Dimensions / Net Weights	448x42x600mm (WxHxD) /13.5KG	
Packing Dimensions / Gross weights	680x190x780mm (WxHxD) /18.5KG	
Accessories		
1 x 1.8 Power Cord with lock connector		
Option Relate Item		
CD-018	1.8meter DVI-D Cable	
CU-018	1.8meter USB Cable	