



### Optional Remote IP Access

- An expansion slot allows you to add an optional KVM over IP module to enable remote access to your servers.
- Gain BIOS level access to your servers for system maintenance, support or failure recovery via secure SSL authentication and encryption.




The Anso range of LCD console drawers provide a variety of features that simplify to access servers to making system monitoring, troubleshooting and software upgrades.

The self-locking rails when in the fully extended open position and the ultra convenient auto lock release when the LCD panel is closed, make for simple and hassle-free operation.


Configure with 21.5 or 23.8 inch A-Grade FHD LCD panels, combo DB15 8 or 16 port integrated KVM switch & with an option remote IP console.

### Features

- Facilitated by screen rotate function.
- Support combo interface, GA-USB & VGA-PS/2.
- Durable 104-key keyboard and touch pad.
- Quick and simple installation.
- Self-locking and auto release rails for ultra convenience.
- Port selection via push buttons or On-Screen-Display (OSD).
- Dedicated daisy chain port to expand up to 240 servers.
- Access Control List (ACL) security function for up to 8 independent user accounts.



Rear of KVM-2108AST-M5  
Rear of KVM-2408AST-M5



Rear of KVM-2116AST-M5  
Rear of KVM-2416AST-M5

Part No.	KVM-2108AST-M5	KVM-2116AST-M5	KVM-2408AST-M5	KVM-2416AST-M5
Direct no. of Computers	8	16	8	16
Maximum no. of Computers	232(Daisy Chain)	240(Daisy chain)	232(Daisy Chain)	240(Daisy chain)
LCD	Size	21.5"		23.8"
	Backlight	LED		LED
	Resolution	1920*1080 FULL HD (support up to 1920*1200)		1920*1080 FULL HD (support up to 1920*1200)
	Max.color	16.7M		16.7M
	Luminance	250cd/m2		250cd/m2
	View Angel (H/V)	178 / 178		178 / 178
	Contrast Ratio	3000 : 1		1000 : 1
Port Selection	Push Button, OSD or Hotkey			
Expansion Slot	Yes, option for Remote IP Access			
KB/Mouse Emulation	USB & PS2			
Rack Depth	600mm to 1300mm ( rack cabinet front rails to rear rails )			
Power	100-240V AC 50/60Hz via IEC Type power cord			
Environment	Operation temp: 0 to 50 °C Storage temp: -20 to 60 °C Humidity: 10% - 90%, non-condensing Shock: 10G acceleration ( 11ms duration) Vibration: 17 to 500Hz 1G PTP			
Physical Dimensions / Net Weights	448 x 44 x 790mm (WxHxD) / 19.5KG			
Packing Dimensions / Gross weights	580 x 195 x 940mm (WxHxD) / 23KG			
<b>Accessory</b>				
1.8meter IEC Type Power Cord				
<b>Option Relate Item</b>				
CVU-018	1.8meter 2-in-1 KVM Cable-USB&VGA	CVP-018	1.8meter 3-in-1 KVM Cable-PS/2&VGA	
CVU-030	3.0meter 2-in-1 KVM Cable-USB&VGA	CVP-030	3.0meter 3-in-1 KVM Cable-PS/2&VGA	
CVU-050	5.0meter 2-in-1 KVM Cable-USB&VGA	CVP-050	5.0meter 3-in-1 KVM Cable-PS/2&VGA	
DIP-101	KVM over IP module for Remote Bios Level Access			

# Combo DB15 LCD Console Drawers Screen Rotate Version

Optimize rack space. Maximize rack monitoring  
Ver. 2023-9-03




Lift the display



Display rotate to the right



Operating position

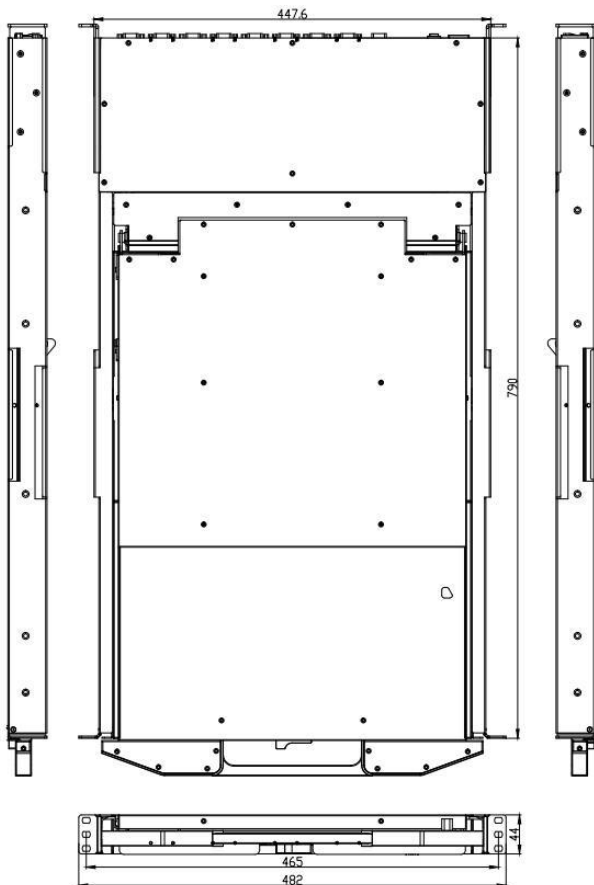

Rear of KVM-2108AST-M5  
Rear of KVM-2408AST-M5



Rear of KVM-2116AST-M5  
Rear of KVM-2416AST-M5

