




LCD console drawers provide a variety of features that simplify to access servers to making system monitoring, troubleshooting and software upgrades.

The self-locking rails when in the fully extended open position and the ultra convenient auto lock release when the LCD panel is closed, make for simple and hassle free operation.

Configure with 21.5 or 23.8 inch A-Grade FHD LCD panels, combo DB15 8 or 16 port integrated KVM switch & additional one USB local console.

Features

- Facilitated by screen rotate function.
- Support combo interface, VGA-USB & VGA-PS/2.
- Additional one USB Local console to add local KB/Mouse & VGA.
- Durable 104-key keyboard and touch pad.
- Quick and simple installation.
- Self-locking and auto release rails for ultra convenience.
- Port selection via push buttons or On-Screen-Display (OSD).
- Dedicated daisy chain port to expand up to 240 servers.



Rear of KVM-2108AST-M5/ULC
KVM-2408AST-M5/ULC



Rear of KVM-2116AST-M5/ULC
KVM-2416AST-M5/ULC

| Part No. | KVM-2108AST-M5/ULC | KVM-2116AST-M5/ULC | KVM-2408AST-M5/ULC | KVM-2416AST-M5/ULC |
|------------------------------------|---------------------------------------------------------------------------|--------------------|------------------------------------|--------------------|
| Direct no. of Computers | 8 | 16 | 8 | 16 |
| Maximum no. of Computers | 232(Daisy Chain) | 240(Daisy chain) | 232(Daisy Chain) | 240(Daisy chain) |
| LCD | Size | 21.5" | 23.8" | |
| | Backlight | LED | | LED |
| | Resolution | 1920*1080 FULL HD | | 1920*1080 FULL HD |
| | Max.color | 16.7M | | 16.7M |
| | Luminance | 250cd/m2 | | 250cd/m2 |
| | View Angel (H/V) | 178 / 178 | | 178 / 178 |
| | Contrast Ratio | 3000 : 1 | | 1000 : 1 |
| Port Selection | Push Button, OSD or Hotkey | | | |
| USB Local console | Yes , USB x2 for KB/ Mouse , VGA x1 | | | |
| KB/Mouse Emulation | USB & PS2 | | | |
| Rack Depth | 600mm to 1300mm (rack cabinet front rails to rear rails) | | | |
| Power | 100-240V AC 50/60Hz via IEC Type power cord | | | |
| Environment | Operation temp: 0 to 50℃ | | | |
| | Storage temp: -20 to 60℃ | | | |
| | Humidity: 10% - 90%, non-condensing | | | |
| | Shock: 10G acceleration (11ms duration) Vibration: 17 to 500Hz 1G PTP | | | |
| Physical Dimensions / Net Weights | 448 x 44 x 790mm (WxHxD) / 19KG | | 448 x 44 x 790mm (WxHxD) / 19.5KG | |
| Packing Dimensions / Gross weights | 580 x 195 x 940mm (WxHxD) / 22.5KG | | 580 x 195 x 940mm (WxHxD) / 23KG | |
| Accessory | | | | |
| 1.8meter IEC Type Power Cord | | | | |
| Option Relate Item | | | | |
| CVU-018 | 1.8meter 2-in-1 KVM Cable-USB&VGA | CVP-018 | 1.8meter 3-in-1 KVM Cable-PS/2&VGA | |
| CVU-030 | 3.0meter 2-in-1 KVM Cable-USB&VGA | CVP-030 | 3.0meter 3-in-1 KVM Cable-PS/2&VGA | |
| CVU-050 | 5.0meter 2-in-1 KVM Cable-USB&VGA | CVP-050 | 5.0meter 3-in-1 KVM Cable-PS/2&VGA | |




Lift the display




Display rotate to the right



Operating position

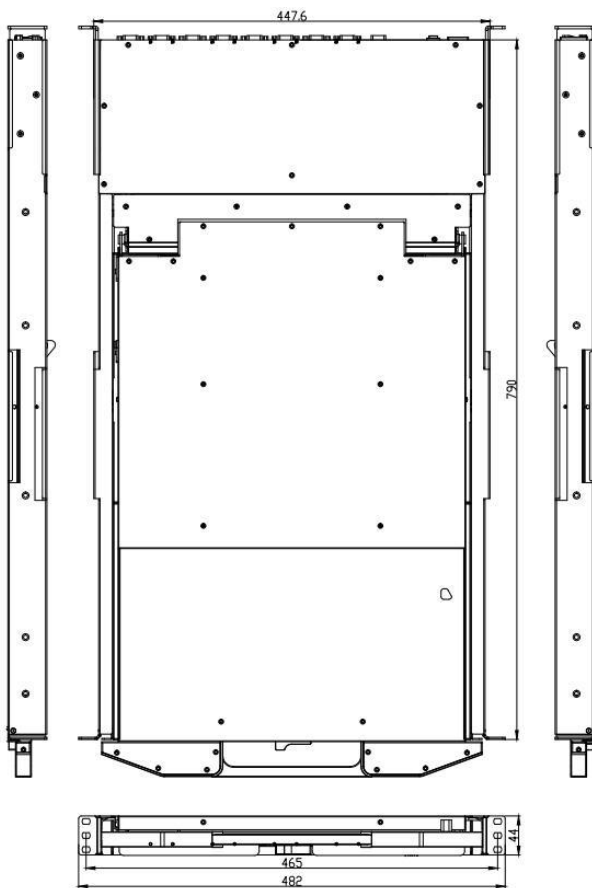

Rear of KVM-2108AST-M5/ULC
 KVM-2408AST-M5/ULC



Rear of KVM-2116AST-M5/ULC
 KVM-2416AST-M5/ULC

