


# Rack Mount Industrial Display Monitor

Model # RM-2x7

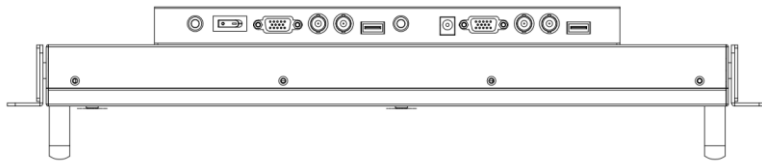

## Features

- Compact 19 inch rack mountable with 3U height
- Dual 7 inch LCD panel, support 1280 x 800 resolution
- VGA, Composite Video Input
- 90 ° tilt adjustment while mounted in rack: 45° ~-45° ( V )
- Heavy duty steel chassis with hardness glass protect screen
- Front osd control buttons to optimized display

## Option

- BNC Loop-in-out
- HDMI input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen

### LCD Characteristics :

Screen Size	7 inch
Backlight Type	LED
Resolution	1280x800
Contrast Ratio	800:1
Brightness ( cd/m2 )	400
View Angles ( H/V )	160/160
Pixel Size ( HxV ) mm	0.117x0.117
Max. Color	16.7M

### User Controls Interface:

Power ON / OFF via Front Button
Power Mode Status LED indicator
OSD ( On Screen Display ) Buttons

### Mechanical and Environment:

Height	3U
IP Protect	N/A
Mounting	Rack Mount
Construction	Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	5% - 95% ( non -condensing )
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak ( 11 ms )
Physical Dimension (WxHxD)	482 x 132 x 63 (mm)
Packing Dimension (WxHxD)	600 x 190 x 320 (mm)
Net Weight / Gross Weight	3.5 / 5 (KGs)
Certification and Approvals	CE / FCC / RoHs

### Input Signals:

VGA	D-SUB 15Pin Connector (Female)
Composite Video	RCA plug
Audio	3.5" Jack
Power Input	External power adapter
Touch-USB ( option )	USB A Type connector
Touch-RS232 ( option )	D-SUB 9P connector ( Female )

### Power Specifications :

AC Power Input	100-240VAC / DC 12V external AC adapter
Wide Range DC Power Input ( option )	Screw Type Terminal Block with internal wide Range DC 9-36V power module

