


# Rack Mount Industrial Display Monitor

Model # RM-2x8

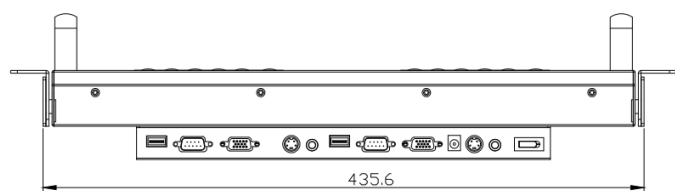

## Features

- Compact 19 inch rack mountable with 4U height
- Dual 8 inch LCD panel, support 1024 x 768 resolution
- VGA, Composite Video Input
- 90 ° tilt adjustment while mounted in rack: 45° ~-45° ( V )
- Heavy duty steel chassis with hardness glass protect screen
- Front osd control buttons to optimized display

## Option

- BNC Loop-in-out
- HDMI input
- 3G / HD / SD-SDI broadcast grade input
- DC 9~36 V power input
- AR Hardness glass
- Touch screen

### LCD Characteristics :

Screen Size	8 inch
Backlight Type	LED
Resolution	1024x768
Contrast Ratio	700:1
Brightness ( cd/m2 )	300
View Angles ( H/V )	150/150
Pixel Size ( HxV ) mm	0.05275x0.15825
Max. Color	RGB strip
MTBF ( Hrs. )	50,000

### Input Signals:

VGA	D-SUB 15Pin Connector (Female)
Composite Video	RCA plug
Audio	3.5" Jack
Power Input	External power adapter
Touch-USB ( option )	USB A Type connector
Touch-RS232 ( option )	D-SUB 9P connector ( Female )

### Power Specifications :

AC Power Input	100-240VAC / DC 12V external AC adapter
Wide Range DC Power Input ( option )	Screw Type Terminal Block with internal wide Range DC 9-36V power module

### User Controls Interface:

Power ON / OFF via Front Button
Power Mode Status LED indicator
OSD ( On Screen Display ) Buttons

### Mechanical and Environment:

Height	4U
IP Protect	N/A
Mounting	Rack Mount
Construction	Metal Housing
Operating Temperature	0 - 50 deg. C
Operating Humidity	5% - 95% ( non -condensing )
Anti-Vibration	5 - 500 Hz / 1 Grms PTP
Anti-Shock	15G / Peak ( 11 ms )
Physical Dimension (WxHxD)	483 x 186 x 64 (mm)
Packing Dimension (WxHxD)	600 x 190 x 320 (mm)
Net Weight / Gross Weight	7 / 8.5 (KGs)
Certification and Approvals	CE / FCC / RoHS

